



Navigation Lights

COLREG'72



Navigation Lights **DHR 55** For Seagoing Vessels Of
Less Than 50 Mtrs In Length According To And
Complying With International Regulations For
Preventing Collisions At Sea (Colreg'72)




With Bracket



Base Mounting



Hoistable

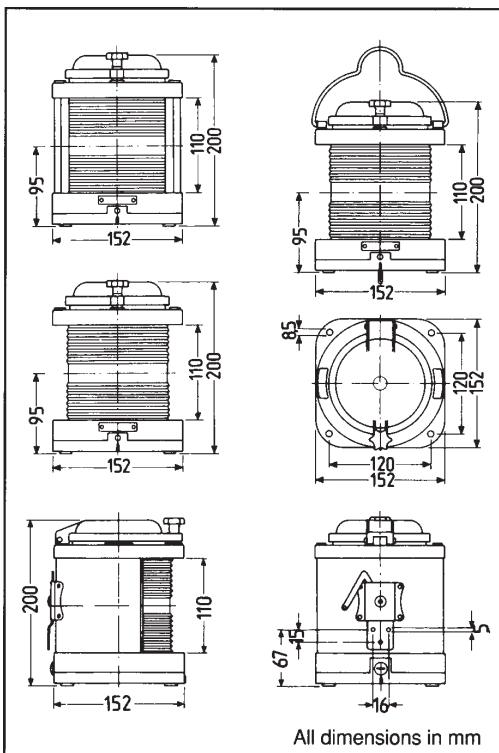

Technical Data

Materials:

Mat black polycarbonate, reinforced with fibre glass
Metal parts non-corrosive seawater resistant, non-magnetic

Optics:

Fresnel polycarbonate lens, shock resistant, interchangeable
Protection class:

Cable Entry:

Cable gland Pg 9, cable entry optional from below or side

Bulbs (normalised):

220V - 53W - 40 cd	Lampholder Bay 15d
110V - 47W - 40 cd	Voltage to be specified when
24V - 25W - 40 cd	ordering
12V - 25W - 40 cd	

Mounting:

Base or bracket attachment for sectional lights
Base mounting or hoistable for all round lights

Positioning:

See drawing

Specifications:

Sectional lights: with bracket (Z) and base mounting (V)

All round lights: base mounting (V) and hoistable (H)


Maintenance:

All parts are made of non-corrosive materials and do not require any special protective care.

These parts can be supplied as back-up spares for on board servicing.

Navigation Lights



Navigation Lights DHR 55						
BASE MOUNTING	colour	order no.	horiz. Sector	visibility	kg	
Starboard	green	SB55V	112,5	2n.m.	1,0	
Port	red	BB55V	112,5	2n.m.	1,0	
Masthead	white	TW55KV	225	5n.m.	10	
Stern	white	HW55V	135	2n.m.	1,0	
Towing	yellow	HGL55V	135	2n.m.	1,0	
All round white	white	RW55V	360	2n.m.	0,9	
All round red	red	RR55V	360	2n.m.	0,9	
All round green	green	RGR55V	360	2n.m.	0,9	
Manoeuvring	white	RW55MV	360	5n.m.	0,9	
WITH BRACKET	colour	order no.	horiz. Sector	visibility	kg	
Starboard	green	SB55Z	112.5	2n.m.	1,2	
Port	red	BB55Z	112.5	2n.m.	1,2	
Masthead	white	TW55KZ	225	5n.m.	1,2	
Stern	white	HW55Z	135	2n.m.	1,2	
Towing	yellow	HGL55Z	135	2n.m.	1,2	
HOISTABLE	colour	order no.	horiz. Sector	visibility	kg	
All round white	white	RW55H	360	2n.m.	1,0	
All round red	red	RR55H	360	2n.m.	1,0	
All round green	green	RGR55H	360	2n.m.	1,0	

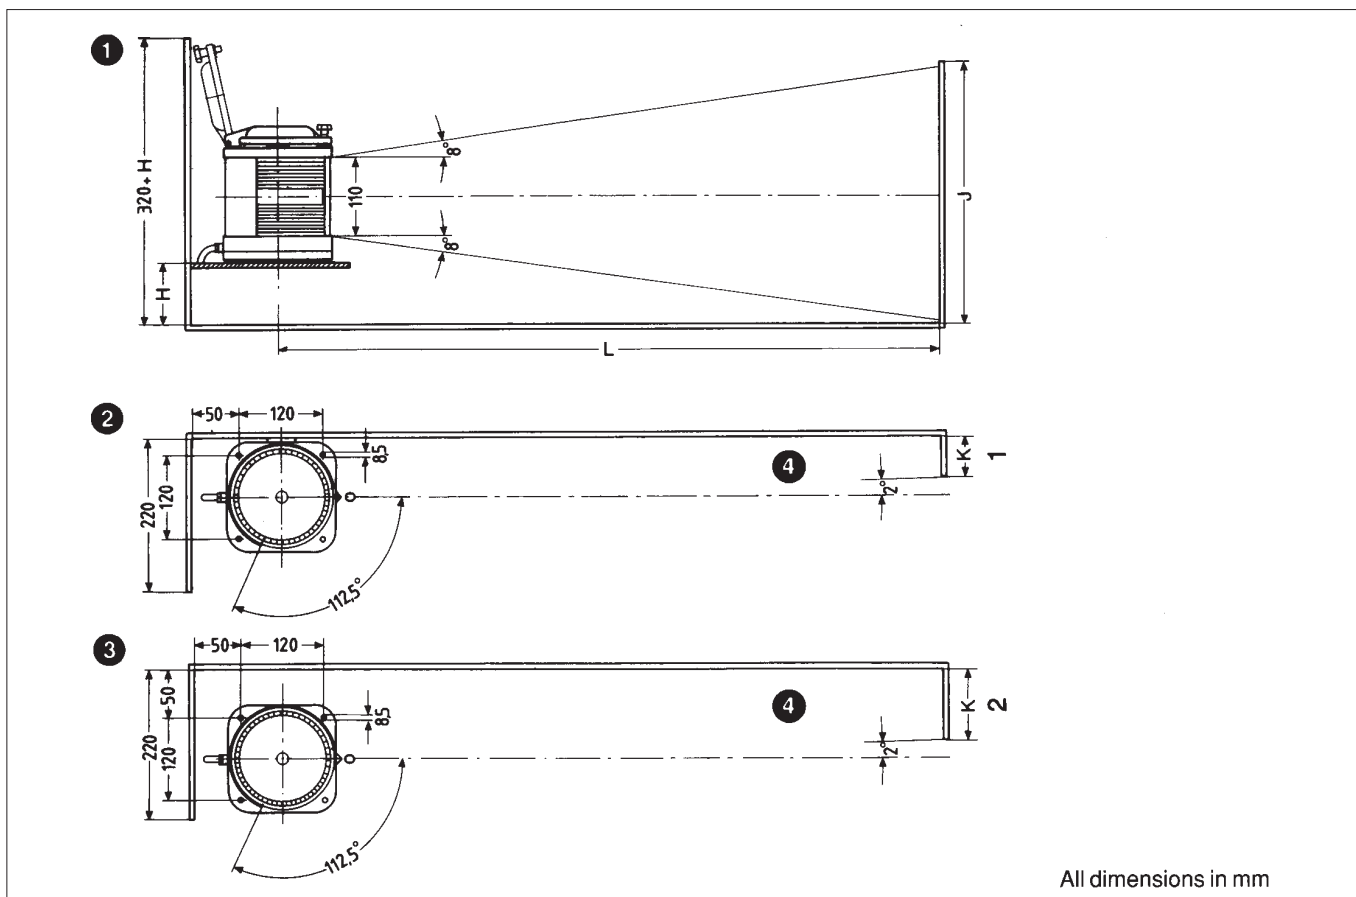

L	H	K1	J
345	0	72	205
400	8	70	220
500	22	66	248
600	36	63	276
700	50	60	304
800	64	56	332
910	79	52	363

L	H	K2	J
345	0	98	205
400	8	96	220
500	22	92	248
600	36	89	276
700	50	86	304
800	64	82	332
910	79	78	363






POSITIONING OF SIDE LIGHTS DHR 55	
1	STARBOARD LIGHT
2	STARBOARD LIGHT BASE MOUNTING SB55V
3	STARBOARD LIGHT SIDE MOUNTING SB55Z
4	INBOARD SCREEN INSIDE MAT BLACK

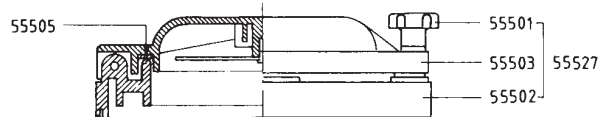

- 55508 wit
- 55523 grijs smoky
- 55509 rood
- 55510 groen
- 55511 geel
- 55524 blauw



- 55514 12V
- 55515 24V
- 55532 32V
- 555110 110V
- 555220 220V

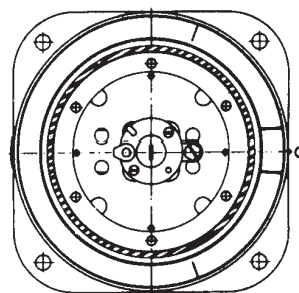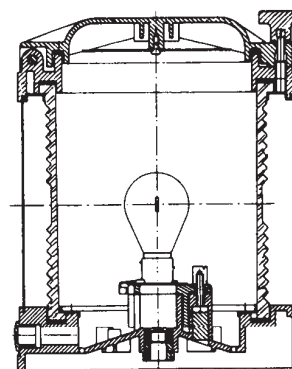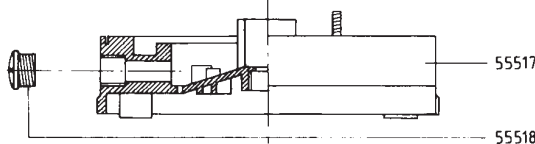

- 55520 SB
- 55520 BB
- 55521 TW
- 55522 HW
- 55522 HGL

